



苏州市胥江消防设备厂

Suzhou Xujiang Fire Fighting Facility Factory



中国·胥江
CHINA · XUJIANG

Suzhou Xujiang Fire Fighting Facility Factory

Company Introduction

[Http://www.ceswel.com](http://www.ceswel.com)

Suzhou Xujiang Fire Fighting Facility Factory was established in 2001, located in the eastern coastal economic developing area of China, Suzhou city, 50 kilometers from Shanghai Port.

We have more than 20 years' experience in manufacturing and exporting experience in Fire fighting products. We can produce dry powder, co2, foam, water, trolley extinguisher, enjoying a high reputation as regular supplier to Europe, Middle East, South America, Africa etc.

We focus on supplying high effective fire fighting products with good quality. Now we have the certificate of BSI EN3, TUV CE and ISO-9001. We are sincerely looking for partners to develop and cooperate with us in new business opportunities. Our brief: Best quality, Best service.



CONTENTS

ITEMS

Page

■ DRY POWDER FIRE EXTINGUISHER

Kitemark/KM EN3 Dry Powder Fire Extinguisher.....	01-04
CE Dry Powder Fire Extinguisher.....	05
Foot Ring Dry Powder Fire Extinguisher.....	06
Embedded Dry Powder Fire Extinguisher.....	07
Automatic Hanging Dry Powder Fire Extinguisher.....	08
CE Wheeled Dry Powder Fire Extinguisher.....	09

■ CO2 FIRE EXTINGUISHER

Kitemark/KM EN3 CO2 Fire Extinguisher.....	10
CE CO2 Fire Extinguisher.....	11
Carbon Steel CO2 Fire Extinguisher.....	12
Alloy Steel CO2 Fire Extinguisher.....	13
Wheeled CO2 Fire Extinguisher.....	14

■ FOAM FIRE EXTINGUISHER

Kitemark/KM EN3 Foam Fire Extinguisher.....	15
CE Foam Fire Extinguisher.....	16
Stainless Foam Fire Extinguisher.....	17
Wheeled Foam Fire Extinguisher.....	18

■ WATER FIRE EXTINGUISHER

Kitemark/KM EN3 Water Fire Extinguisher.....	19
CE Water Fire Extinguisher.....	20

■ ACCESSORIE

Valve.....	21
Other.....	22-23

POWDER FIRE EXTINGUISHER

BSI EN3



1 KG MFZL1(XJ01-01)



KM532461

外 径	(out-diameter):85mm
容 积	(volume):1.4L
瓶 高	(cylinder length):280 ± 5mm
灭火器重量	(extinguisher weight):2.0KG
灭火剂重量	(filling weight):1 ± 0.05KG
温度范围	(temperature range):-30℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):0.79mm
材 质	(material):SPCC
灭火等级	(fire Rate):8A 34B C
包装尺寸	(packing size):29.5X20X36(cm)/6pcs
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3



2 KG MFZL2(XJ01-02)



KM532461

外 径	(out-diameter):110mm
容 积	(volume):2.6L
瓶 高	(cylinder length):315 ± 5mm
灭火器重量	(extinguisher weight):3.7KG
灭火剂重量	(filling weight):2 ± 0.06KG
温度范围	(temperature range):-20℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.07mm
材 质	(material):SPCC
灭火等级	(fire Rate):13A 34B C
包装尺寸	(packing size):25X25X42(cm)/4pcs
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3

POWDER FIRE EXTINGUISHER

BSI EN3



6KG MFZL6(XJ01-03)



KM532461

外 径	(out-diameter):160mm
容 积	(volume):7.8L
瓶 高	(cylinder length):445 ± 5mm
灭火器重量	(extinguisher weight):9.5KG
灭火剂重量	(filling weight):6 ± 0.12KG
温度范围	(temperature range):-20℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.24mm
材 质	(material):SPCC
灭火等级	(fire Rate):27A 144B C
包装尺寸	(packing size):17.5X17X55.5(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3



9KG MFZL9(XJ01-04)



KM532461

外 径	(out-diameter):180mm
容 积	(volume):11.5L
瓶 高	(cylinder length):510 ± 5mm
灭火器重量	(extinguisher weight):13.7KG
灭火剂重量	(filling weight):9 ± 0.18KG
温度范围	(temperature range):-20℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.30mm
材 质	(material):SPCC
灭火等级	(fire Rate):34A 183B C
包装尺寸	(packing size):19.5X19X62(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3

POWDER FIRE EXTINGUISHER

BSI EN3



2KG MFZL 2-A(XJ01-05)



外 径	(out-diameter):110mm
容 积	(volume):2.6L
瓶 高	(cylinder length):315 ± 5mm
灭火器重量	(extinguisher weight):3.7KG
灭火剂重量	(filling weight):2 ± 0.06KG
温度范围	(temperature range):-20℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.07mm
材 质	(material):SPCC
灭火等级	(fire Rate):13A 55B C
包装尺寸	(packing size):25X25X42(cm)/4pcs
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3



6KG MFZL 6-A(XJ01-06)



外 径	(out-diameter):160mm
容 积	(volume):7.8L
瓶 高	(cylinder length):445 ± 5mm
灭火器重量	(extinguisher weight):9.5KG
灭火剂重量	(filling weight):6 ± 0.12KG
温度范围	(temperature range):-20℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.24mm
材 质	(material):SPCC
灭火等级	(fire Rate):43A 233B C
包装尺寸	(packing size):17.5X17X55.5(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3

POWDER FIRE EXTINGUISHER

BSI EN3



9KG MFZL 9-A(XJ01-07)



KMS32461

外 径	(out-diameter):180mm
容 积	(volume):11.5L
瓶 高	(cylinder length):510 ± 5mm
灭火器重量	(extinguisher weight):13.7KG
灭火剂重量	(filling weight):9 ± 0.18KG
温度范围	(temperature range):-20℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.30mm
材 质	(material):SPCC
灭火等级	(fire Rate):55A 233B C
包装尺寸	(packing size):19.5X19X62(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3



4KG MFZL4(XJ01-08)



KMS32461

外 径	(out-diameter):130mm
容 积	(volume):5.1L
瓶 高	(cylinder length):435 ± 5mm
灭火器重量	(extinguisher weight):6.8KG
灭火剂重量	(filling weight):4 ± 0.08KG
温度范围	(temperature range):-20℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.30mm
材 质	(material):SPCC
灭火等级	(fire Rate):21A 113B C
包装尺寸	(packing size):14.5X14X54(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3

POWDER FIRE EXTINGUISHER



Certificated by TUV with CE mark

Designed according to standard EN3-8

Production Under ISO9001 Quality System

Filled in High quality ABC dry powder, standard EN615.

Suitable For Class A B C Fires



TECHNICAL DETAILS

Model No	XJ02-09	XJ02-01	XJ02-02	XJ02-03	XJ02-04	XJ02-05	XJ02-06	XJ02-07	XJ02-08
Capacity	0.5-0.8kg	1kg	2kg	3kg	4kg	5kg	6kg	9kg	12kg
Out-Diameter(mm)	80	85	110	130	130	140	160	180	185
Cylinder height(mm)	200	280	315	335	415	435	445	510	560
Volume(L)	0.85	1.4	2.6	3.9	5.1	5.8	7.8	11.6	13.3
Gross Weight(kg)	1.7	2.2	3.7	5.2	6.8	7.5	9.3	13.7	17.2
Material	SPCC								
Max Working pressure (bar)	18	18	18	18	18	18	18	18	18
Test pressure (bar)	29	29	29	29	29	29	29	29	29
Temperature Range	-30℃~+60℃								
Fire Rate	5A 21B	8A 34B	13A55B	21A70B	21A 113B	21A 144B	27A144B	34A183B	55A 233B
Packing Size(cm)	25.5*18*28/6 PCS	29.5*20*36/6 PCS	24.5*24.5*42/ 4PCS	14.5*14*45	15*15*54	15.5*15*54.5	17.5*17*55.5	19.5*19*62	20*20*66

◎TEL : +86-512-66218618 ◎FAX : +86-512-66218355

◎TP1818@263.net ◎manager@ceswel.com

◎Http://www.ceswel.com

POWDER FIRE EXTINGUISHER FOOT RING



Designed according to standard GB4351.1-2005
Produced under ISO9001 Quality System
Filled in High Quality ABC Dry Powder
Suitable for Class A B C Fires

TECHNICAL DETAILS

Model No	XJ03-01A	XJ03-01B	XJ03-02	XJ03-03	XJ03-04	XJ03-05	XJ03-06	XJ03-07	XJ03-08	XJ03-09	XJ03-10
Capacity	1kg	1kg	2kg	3kg	4kg	5kg	6kg	8kg	9kg	10kg	12kg
Out-Diameter(mm)	80	90	110	130	130	140	150	163	180	180	180
Cylinder Height(mm)	265	240	300	330	415	435	480	495	490	520	630
Volume(L)	1.25	1.25	2.5	3.6	4.7	6.2	7	9.4	10.6	12.5	14.6
Gross Weight(kg)	1.7	1.7	3.3	4.9	6.3	7.7	9	11.5	12.7	14	16.6
Material	SPCC										
Max Working pressure(bar)	18	18	18	18	18	18	18	18	18	18	18
Test pressure(bar)	29	29	29	29	29	29	29	29	29	29	29
Temperature Range(°C)	-20°C~+60°C										
Fire Rate	5A21B	5A21B	8A34B	13A55B	13A70B	21A70B	21A113B	27A183B	34A183B	34A183B	43A233B
Packing Size(cm)	49*20.5*33 / 10Pcs	49*20.5*33 / 10Pcs	24.5*24.5*40 / 4Pcs	28.5*15*43 / 2Pcs	28.5*15*51 / 2Pcs	30.5*16*53.5 / 2Pcs	32.5*15*58 / 2Pcs	17.5*17.5*58.5 / 2Pcs	19*19*59	19*19*61	19*19*72.5

POWDER FIRE EXTINGUISHER EMBEDDED



Designed According to America Market
Produced under ISO9001 Quality System
Filled in High Effective ABC Dry Powder
Suitable for fire class A B C

TECHNICAL DETAILS

Model No	XJ07-01	XJ07-02	XJ07-03	XJ07-04	XJ07-05
Capacity	2LB	5LB	10LB	15LB	20LB
Out-Diameter(mm)	88	110	145	163	185
Cylinder Height(mm)	287	324	400	436	490
Volume(L)	1.4	2.65	5.65	7.9	11.3
Gross Weight(kg)	2	4.1	7.3	10.2	13.4
Cylinder Material	SPCC				
Max Working pressure(bar)	18	18	18	18	18
Test pressure(bar)	29	29	29	29	29
Temperature Range(°C)	-20 °C~+60 °C				
Fire Rate	5A 21B C	8A 34B C	21A 113B C	34A 113B C	34A 183B C
Packing Size(cm)	29*19.5*39.5/6pcs	25*25*42.5/4	16*15.5*48.5	18*17.5*52	20*19.5*58

POWDER FIRE EXTINGUISHER AUTOMATIC HANGING



Produced under ISO9001 Quality System
 Designed According to GB4351.1-2005
 High Effective ABC Dry Powder Filled
 Suitable for Fire class A B C

TECHNICAL DETAILS

Model No	XJ08-1	XJ08-2	XJ08-3	XJ08-4	XJ08-5
Capacity	1kg	4kg	6kg	9kg	12kg
Out-Diameter(mm)	85	230	280	320	320
Cylinder Height(mm)	265	210	260	330	330
Volume(L)	1.25	5.7	8.6	17	17
Gross Weight(kg)	2	7.5	9.5	15	18
Cylinder Material	SPCC				
Max Working pressure(bar)	18	18	18	18	18
Test pressure(bar)	29	29	29	29	29
Temperature Range(°C)	-20°C~+60°C				
Fire Rate	5A21B	13A70B	21A113B	34A183B	34A233B
Packing Size(cm)	49*20.5*33/10pcs	24*24*31	29*29*36	33*33*40	33*33*40

WHEELED DRY POWDER FIRE EXTINGUISHER



Designed According to GB4351.1-2005
 Production under ISO9001 Quality System
 High Effective ABC Dry Powder Filled
 Suitable for Fire class A B C

TECHNICAL DETAILS

Model No	XJ30-01	XJ30-2	XJ30-03	XJ30-4
Capacity	25kg	50kg	75kg	100kg
Out-Diameter(mm)	280	320	400	400
Cylinder height(mm)	620	760	800	945
Volume(L)	38	59	85	120
Gross Weight(kg)	56	83	110	135
Cylinder Material	SPCC			
Max Working pressure (bar)	18	18	18	18
Test pressure (bar)	29	29	29	29
Temperature Range	-20°C ~ +60°C			
Fire Rate	55A 233B C	55A 233B C	55A 233B C	55A 233B C
Packing Size(cm)	46*48*98	46*48*106	62*50*112	56*53*120

CO₂ FIRE EXTINGUISHER

BSI EN3



2KG MT-2(XJ01-09)



外 径	(out-diameter):116mm
容 积	(volume):3L
瓶 高	(cylinder length):385 ± 5mm
灭 火 器 重 量	(extinguisher weight):6.3KG
灭 火 剂 重 量	(filling weight):2KG
温 度 范 围	(temperature range):-30℃~+60℃
最 大 工 作 压 力	(max working pressure):174bar
测 试 压 力	(test pressure):250bar
最 小 壁 厚	(min wall-thickness):2.32mm
材 质	(material):34CrMo4
灭 火 等 级	(fire Rate):34B
包 装 尺 寸	(packing size):16.5X13X51(cm)
制 造 标 准 证	(Manufacturing standard):BS EN3-7:2004+A1:2007 (certification):Kitemark EN3



2KG MT-2(XJ01-10)



外 径	(out-diameter):116mm
容 积	(volume):3L
瓶 高	(cylinder length):385 ± 5mm
灭 火 器 重 量	(extinguisher weight):6.3KG
灭 火 剂 重 量	(filling weight):2KG
温 度 范 围	(temperature range):-30℃~+60℃
最 大 工 作 压 力	(max working pressure):174bar
测 试 压 力	(test pressure):250bar
最 小 壁 厚	(min wall-thickness):2.32mm
材 质	(material):34CrMo4
灭 火 等 级	(fire Rate):34B
包 装 尺 寸	(packing size):53X17X14(cm)
制 造 标 准 证	(Manufacturing standard):BS EN3-7:2004+A1:2007 (certification):Kitemark EN3



5KG MT-5(XJ01-11)



外 径	(out-diameter):136mm
容 积	(volume):7.5L
瓶 高	(cylinder length):655 ± 8mm
灭 火 器 重 量	(extinguisher weight):14.7KG
灭 火 剂 重 量	(filling weight):5KG
温 度 范 围	(temperature range):-20℃~+60℃
最 大 工 作 压 力	(max working pressure):174bar
测 试 压 力	(test pressure):250bar
最 小 壁 厚	(min wall-thickness):2.72mm
材 质	(material):34CrMo4
灭 火 等 级	(fire Rate):89B
包 装 尺 寸	(packing size):79X20X16(cm)
制 造 标 准 证	(Manufacturing standard):BS EN3-7:2004+A1:2007 (certification):Kitemark EN3

CO₂ FIRE EXTINGUISHER



Certificated by TUV with CE mark

Designed under standard ISO9809-1:2010

Produced under ISO9001 Quality System

High Pressured CO₂ filled

Suitable for Fire class B and E



TECHNICAL DETAILS

Model Number	XJ41-01	XJ41-02	XJ41-03	XJ41-04	X41-05	XJ041-06	XJ41-07	XJ41-08	XJ41-09
Capacity	1.18KG	2KG	3.2KG	2KG	3KG	5KG	6KG	7KG	10KG
Out-Diamter(mm)	104	104	104	116	116	136	136	154	154
Cylinder Height(mm)	312	480	720	385	550	655	770	695	975
Volume(L)	1.78	3	4.85	3	4.5	7.5	9	10.5	15
GrossWeight(kg)	4.11	5.98	8.74	3.98	5.2	7.8	9.1	10.44	14.65
Cylinder Material	Alloy Steel,34 CrMo4								
Max Working Pressure(bar)	174	174	174	174	174	174	174	174	174
Test Pressure(bar)	250	250	250	250	250	250	250	250	250
Temperature Range	-20 °C ~60 °C								
Fire Rate	21B	34B	34B	34B	34B	89B	89B	113B	113B
Packing Size(cm)	25.5*12*41.5 /2	25.5*12*59 /2	14.9*12*84.5	16.5*13*50	16.5*13*67.5	19*15.5*78	19*15.5*90	20.5*17*82	30*30*120

◎TEL : +86-512-66218618 ◎FAX : +86-512-66218355

◎TP1818@263.net ◎manager@ceswel.com

◎Http://www.ceswel.com

CO₂ FIRE EXTINGUISHER CARBON STEEL



Designed according to standard GB4351.1-2005
Produced under ISO9001 Quality System
Filled in High Press CO₂
Suitable for Class B and E Fires

TECHNICAL DETAILS

Model Number	XJ04-01	XJ04-02	XJ04-03	XJ04-04	XJ04-05	XJ04-06	XJ04-07	XJ04-08	XJ04-09	XJ04-010
Capacity	2kg	3kg	3kg	5kg	4kg	4.5kg	5kg	6kg	7kg	9kg
Out-Diameter(mm)	114	114	140	140	152	152	152	152	152	152
Cylinder Height(mm)	420	600	415	640	455	500	570	650	740	930
Volume(L)	3	4.5	4.5	7.5	6	7	7.5	9	10.5	13.4
GrossWeight(kg)	7.6	10.8	10.8	18	15.5	16.3	18	21	23	30
Material	Carbon Steel, CK45									
Max working pressure(bar)	174	174	174	174	174	174	174	174	174	174
Test Pressure(bar)	250	250	250	250	250	250	250	250	250	250
Temperature Range	-20℃~60℃									
Fire Rate	34B	34B	34B	89B	70B	70B	89B	89B	113B	113B
Packing Size(cm)	56*17*13	71*17*13	57*19*16	76*19*16	21*17*60	21*17*65	20*17*69	21*17*79	20*17*86	20*17*100

◎TEL : +86-512-66218618 ◎FAX : +86-512-66218355
◎TP1818@263.net ◎manager@ceswel.com
◎Http://www.ceswel.com

CO₂ FIRE EXTINGUISHER ALLOY STEEL



Designed under standard ISO9809-1:2010
Produced under ISO9001 Quality System
High Pressured CO₂ filled
Suitable for Fire class B and E

TECHNICAL DETAILS

Model Number	XJ42-01	XJ42-02	XJ42-03	XJ42-04	XJ42-05	XJ042-06	XJ42-07
Capacity	2kg	3.5kg	4.5kg	7kg	4KG	6KG	10kg
Out-Diameter(mm)	108	108	140	140	159	159	159
Cylinder Height(mm)	450	720	585	838	410	580	960
Volume(L)	3	5	6.8	10	6	9	14.5
GrossWeight(kg)	5.3	7.6	9.5	14.6	9.5	14	20.5
Material	Alloy Steel, 37Mn						
Max working pressure(bar)	174	174	174	174	174	174	174
Test Pressure(bar)	250	250	250	250	250	250	250
Temperature Range	-20°C~60°C						
Fire Rate	34B	34B	70B	89B	70B	89B	113B
Packing Size(cm)	15.5*12.5*58	15.5*12.5*85	19*15.5*71	19*15.5*96.5	21*17.5*53.5	21*17.5*70.5	30*30*120

◎TEL : +86-512-66218618 ◎FAX : +86-512-66218355

◎TP1818@263.net ◎manager@ceswel.com

◎Http://www.ceswel.com

WHEELED CO2 FIRE EXTINGUISHER



Produced under ISO9001 Quality System
Designed According to EN ISO9890-1
High Pressured Co2 Filled
Suitable for Fire class B & E

TECHNICAL DETAILS

Model No	XJ33-01	XJ33-02	XJ33-03	XJ33-04	XJ33-05
Capacity	10kg	25kg	30kg	45kg	50kg
Out-Diameter(mm)	152	219	232	267	219
Cylinder height(mm)	1025	1330	1370	1513	1330
Volume(L)	15	37.5	46	70	80
Gross Weight(kg)	30.5	92	117	130	207
Cylinder Material	CK45	37Mn	37Mn	37Mn	37Mn
Max Working pressure (bar)	174	174	174	174	174
Test pressure (bar)	250	250	250	250	250
Temperature Range	-20°C ~ +60°C				
Fire Rate	183B	183B	233B	233B	233B
Packing Size(cm)	30*30*120	47*93*150	62*50*112	156*47.5*67	123*62*132

FOAM FIRE EXTINGUISHER

BSI EN3



6L FOAM AFFF-6(XJ01-12)



外 径	(out-diameter):160mm
容 积	(volume):7.8L
瓶 高	(cylinder length):445 ± 5mm
灭火器重量	(extinguisher weight):9.3KG
灭火剂重量	(filling weight):6L ⁺⁰ / _{-0.3L}
温度范围	(temperature range):+5℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.24mm
材 质	(material):SPCC
灭火等级	(fire Rate):21A 144B C
包装尺寸	(packing size):17.5X17X55.5(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3



9L FOAM AFFF-9(XJ01-13)



外 径	(out-diameter):180mm
容 积	(volume):11.5L
瓶 高	(cylinder length):510 ± 5mm
灭火器重量	(extinguisher weight):13.7KG
灭火剂重量	(filling weight):9L ⁺⁰ / _{-0.45L}
温度范围	(temperature range):+5℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.30mm
材 质	(material):SPCC
灭火等级	(fire Rate):27A 183B C
包装尺寸	(packing size):19.5X19X62(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3

FOAM FIRE EXTINGUISHER



Certificated by TUV with CE mark
Designed According to Standard EN3-8
Produced under ISO9001 Quality System
AFFF3% Foam Concentrate
Suitable for Fire class A and B



TECHNICAL DETAILS

Model Number	XJ06-01	XJ06-02	XJ06-03	XJ06-04	XJ06-05
Capacity	2L	3L	6L	9L	10L
Out-Diamter(mm)	110	130	160	180	185
Cylinder Height(mm)	315	335	445	510	545
Volume(L)	2.6	3.9	7.8	11.5	12.8
GrossWeight(kg)	3.7	5.2	9.3	13.5	14.8
Cylinder Material	SPCC with inner coating				
Max working pressure(bar)	18	18	18	18	18
Test Pressure(bar)	29	29	29	29	29
Temperature Range	5°C~+60°C				
Fire Rate	8A34B	13A34B	21A144B	27A183B	34A183B
Packing Size(cm)	25*25*42/4	14.5*14*45	17.5*17*55.5	19.5*19*62	20.5*19.5*65.5

FOAM FIRE EXTINGUISHER STAINLESS



TECHNICAL DETAILS

Model Number	XJ09-07	XJ09-08
Capacity	6L	9L
Out-Diameter(mm)	156	172
Cylinder Height(mm)	470	550
Volume(L)	7.8	11.3
GrossWeight(kg)	9.3	14
Cylinder Material	304	
Max working pressure(bar)	18	18
Test Pressure(bar)	29	29
Temperature Range	5°C~+60°C	
Fire Rate	21A 144B	27A 183B
Packing Size(cm)	17*17*54	19*19*64



Produced under ISO9001 Quality System
 Designed According Standard GB 4351.1-2005
 Filled in AFFF3% Foam Concentrate
 Suitable for Fire class A and B

WHEELED FOAM FIRE EXTINGUISHER



Produced under ISO9001 Quality System
 Designed According to GB4351.1-2005
 Filled in AFFF3% Foam Concentrate
 Suitable for Fire class A B

TECHNICAL DETAILS

Model No	XJ32-01	XJ32-02	XJ32-03	XJ32-04
Capacity	25L	50L	75L	100L
Out-Diameter(mm)	280	320	400	400
Cylinder height(mm)	620	760	800	945
Volume(L)	38	59	85	120
Gross Weight(kg)	56	83	110	135
Cylinder Material	SPCC			
Max Working pressure (bar)	18	18	18	18
Test pressure (bar)	29	29	29	29
Temperature Range	5°C ~ +60°C			
Fire Rate	55A 233B C	55A 233B C	55A 233B C	55A 233B C
Packing Size(cm)	46*48*98	46*48*106	62*50*112	56*53*120

WATER FIRE EXTINGUISHER

BSI EN3



6L WATER MSQ-6(XJ01-14)



外 径	(out-diameter):160mm
容 积	(volume):7.8L
瓶 高	(cylinder length):445 ± 5mm
灭火器重量	(extinguisher weight):9.3KG
灭火剂重量	(filling weight):6L ⁺⁰ / _{-0.3L}
温度范围	(temperature range):+5℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.24mm
材 质	(material):SPCC
灭火等级	(fire Rate):21A
包装尺寸	(packing size):17.5X17X55.5(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3



9L WATER MSQ-9(XJ01-15)



外 径	(out-diameter):180mm
容 积	(volume):11.5L
瓶 高	(cylinder length):510 ± 5mm
灭火器重量	(extinguisher weight):13.7KG
灭火剂重量	(filling weight):9L ⁺⁰ / _{-0.45L}
温度范围	(temperature range):+5℃~+60℃
最大工作压力	(max working pressure):18bar
测试压力	(test pressure):29bar
最小壁厚	(min wall-thickness):1.30mm
材 质	(material):SPCC
灭火等级	(fire Rate):27A
包装尺寸	(packing size):19.5X19X62(cm)
制造标准	(Manufacturing standard):BS EN3-7:2004+A1:2007
证 书	(certification):Kitemark EN3

WATER FIRE EXTINGUISHER







Certificated by TUV with CE mark
Designed According to Standard EN3-8
Produced under ISO9001 Quality System
Suitable For class A



TECHNICAL DETAILS

Model Number	XJ05-01	XJ05-02	XJ05-03	XJ05-04	XJ05-06
Capacity	2L	3L	6L	9L	10L
Out-Diamter(mm)	110	130	160	180	185
Cylinder Height(mm)	315	335	445	510	545
Volume(L)	2.6	3.9	7.8	11.5	12.8
GrossWeight(kg)	3.7	5.2	9.3	13.5	14.8
Cylinder Material	SPCC with inner coating				
Max working pressure(bar)	18	18	18	18	18
Test Pressure(bar)	29	29	29	29	29
Temperature Range	5°C~+60°C				
Fire Rate	8A	13A	21A	27A	34A
Packing Size(cm)	25*25*42/4	14.5*14*45	17.5*17*55.5	19.5*19*62	20.5*19.5*65.5

ACCESSORIE VALVE

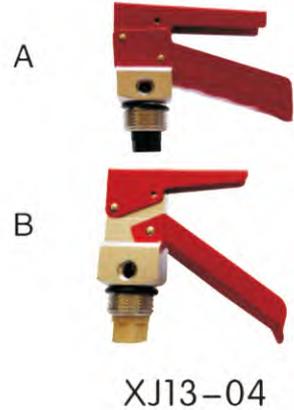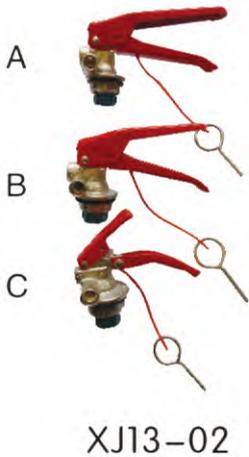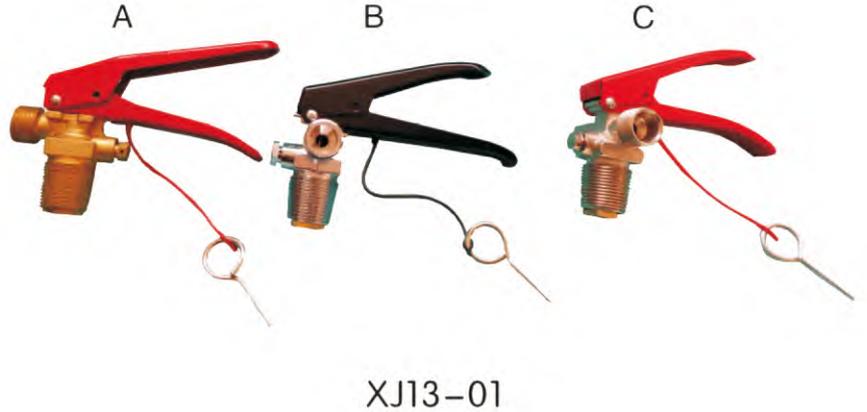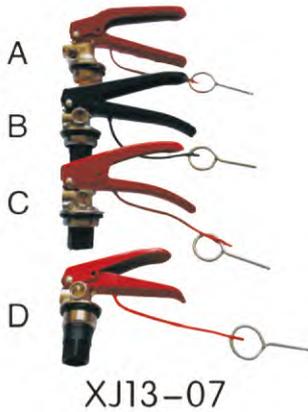

XJ13-03




ACCESSORIE


XJ18-00




XJ14-00

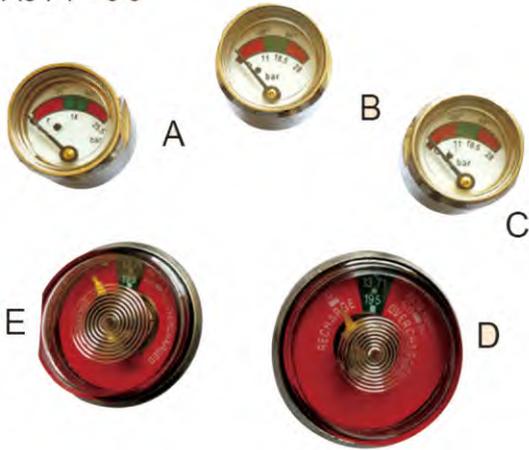

XJ15-00

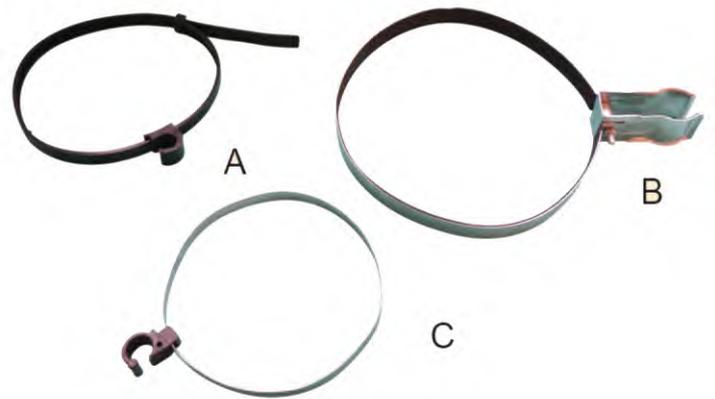

XJ16-00

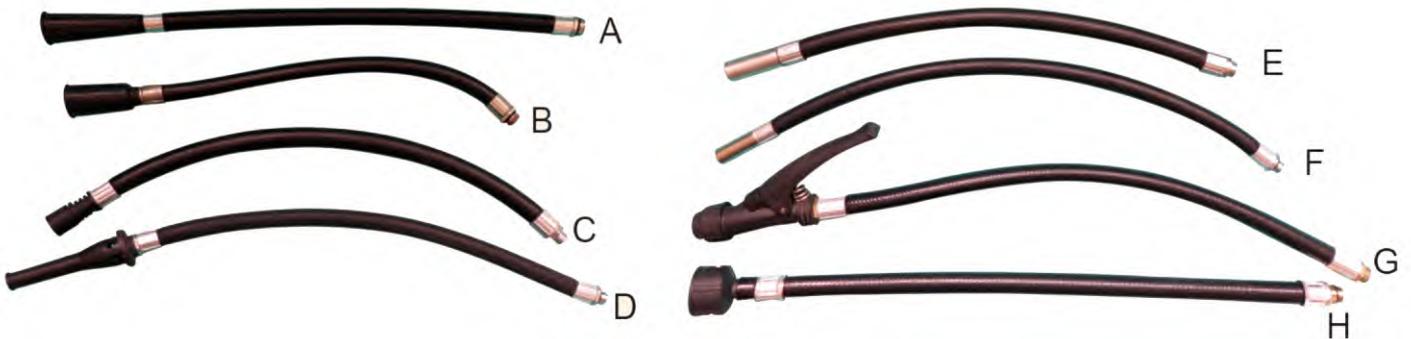


ACCESSORIE





XJ17-00




XJ19-00

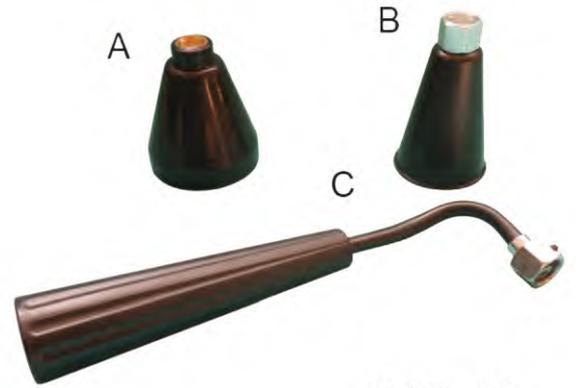


XJ20-00

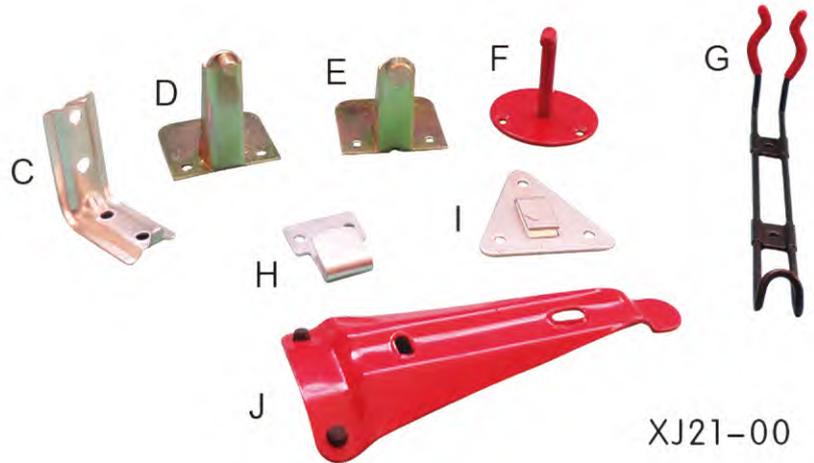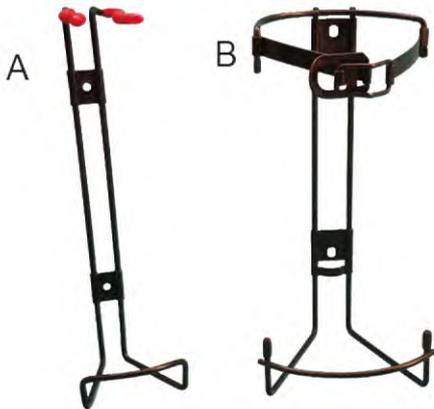

XJ21-00

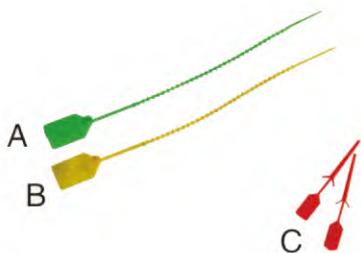

XJ22-00

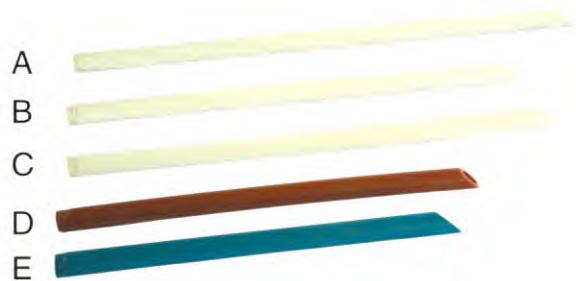

XJ23-00



SUZHOU XUJIANG FIRE FIGHTING FACILITY FACTORY

ADD: No.129,ShangGong rd.,XuKou industrial park,WuZhong District,
SuZhou City,JiangSu Province,China

TEL: +86-512-66218318

FAX: +86-512-66218355

P.C: 215164

E-mail: Tp1818@263.net manager@ceswel.com

<http://www.ceswel.com>